




CONTENTS

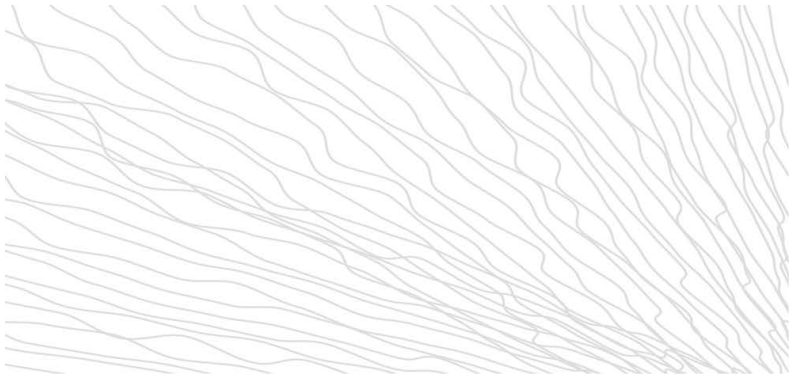

Company Profile	03
Rescue Devie	07
Beam Anchor	13
Srl+tripods	17
Ascender	23
Pully	27
Rope Grab	31
Desenders	37
Hook	41
Carabiner	55
D-ring	71
Buckle	77
Dielectric Part	83
Connector	85
Others	87

WORLD RENOWNED

NAL HON INDUSTRIAL CO., LTD.



COMPANY PROFILE

Increase Your Working Safety

NAL HON INDUSTRIAL CO., LTD. was established in 1981. We specialize in steel alloy, aluminum alloy and stainless steel forging and precise stamping. Since we were founded, we always followed our principle of sincere, quality, innovation, services to our clients. Our creative R&D department constantly keeps developing precise stamping and forging techniques with experienced staffs to create various precision and high quality levels with competitive products. Therefore, our strict quality control management and inspection systems always deeply impressed all customers.

Nal Hon's main products were hanger cargo lifting hooks, tie-down products, professional auto-repair tools and OEM forged items and had a long term relationship with all customers. Time past and tide changing, we have expanded our products category in a decade. Nowadays we have become one of the most professional forging industries in Taiwan of steel alloy, stainless steel and aluminum alloy parts manufacturer of safety equipments used for fall protection. Most popular items have been certified by CE standard and got CE certificates like safety hooks, carabiners, D-rings, rope grabs, fall arresters, auto-descenders, etc.. All of our products are exported throughout the world, and we have earned great reputation and support from customers worldwide. Besides, we do not only manufacture products designed by us but also welcome customers' designs, OEM and ODM items.

NAL HON INDUSTRIAL CO., LTD. will continuously go forward to targets of product high quality, low cost, self-surpassing and unceasingly develop new techniques and products for keeping competitiveness on the global markets. Building reputed Nal Hon trademark image to create giant profit with customers worldwide is our long term goal

QUALITY SATISFACTION SAFETY FIRST INNOVATION





ANSI Standards / ANSI Z359.12-2009

Connecting Components for Personal Fall Arrest System This standard establishes requirements for the performance, design, marking, qualification, test methods and removal from service of connectors.

GATE FACE LOAD TESTING : 3600LBS
GATE SIDE LOAD TESTING : 3600LBS

CE Standards / General Standards

EN363 FALL ARREST EQUIPMENT


Set of personal protective equipment against falls from height, linked to one another and intended to stop a fall. A fall arrest equipment must contain at least a full body harness and a fall arrest equipment.

EN364 TEST METHOD


Describing different test methods of the various PPE is against falls from height, as well as the test equipment.

EN365 GENERAL REQUIREMENTS FOR THE INSTRUCTIONS FOR USE AND THE MARKING

Description of the marking that must figure on the PPE against falls from height and of the information which must appear on the instructions for use.



Gate Face Resistance Test



Gate Side Load Testing



Minor Axis Test



Specific Standards

EN351 MOBILE FALL ARRESTER ON RIGID ANCHORAGE LINE

Equipment consisting of a mobile fall arrester with self-locking, integral with its rigid anchorage line (rail, cable...). An energy reducer can be built-in in the equipment.



EN353-2 MOBILE FALL ARRESTER ON FLEXIBLE ANCHORAGE LINE

Equipment consisting of mobile fall arrester with self-locking, integral with its flexible anchorage line (rope, cable...). An energy reducer (absorber) can be built-in on the equipment.

EN360 SELF-RETRACTABLE FALL

Fall arrester with self-locking device and a self-retractable system for the lanyard. An energy reducer (absorber) can be built-in in the equipment.

EN362 CONNECTOR

Connection element or equipment component. A connector can be carabiner or a snap hook.



EN358 WORK POSITIONING SYSTEM


A work position system consists of components (work positioning belt and lanyard) linked to one another to form a complete equipment.

EN341 PPE AGAINST FALLS FROM HEIGHT


This standard specifies requirements for use for descender devices as rescue equipment to be used in conjunction with personal protective equipment against falls from a height.

EN795 ANCHORAGE DEVICES


Element to which a personal protective equipment can be fastened.




Tensile Testing



Gate Face Load Testing



Gate Side Load Testing



Tensile Testing

SINCE 1981 YOUR BEST CHOICE A FRIEND OF PPE MANUFACTURER.



YAE211

品名 Name	Aluminum Auto Descender with Horn and Wheel
配件 Accessory	YAH030
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.94 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN.110 lbs/ 50 kg MAX.440 lbs/200 kg
下降速度 Absell Ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell Ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



品名 Name	Aluminum Auto Descender with Horn and Wheel
配件 Accessory	YIH019ND
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.94 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX.440 lbs/220 kg
下降速度 Absell Ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell Ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



NC021001

品名 Name	Winch
配件 Accessory	YIH014
簡述 Descriptin	Material Steel Alloy
重量 Weight(g)	
安全工作負荷 Safe Working Load	
表面處理 Finish	ED-Coating ●

YAA012

品名 Name	Aluminum Tripod
配件 Accessory	—
材質 Material	Aluminum Alloy
重量 Weight(g)	27kg
高度 Height	1238 mm~2739 mm
跨徑 / 包裝長度 Span Diameter / Packed length	1150 mm~2250 mm 1370 mm
安全工作負荷 Safe Working Load	150kg
表面處理 Finish	Anodised ●





DESCENDER SERIES



YAE210

品名 Name	Aluminum Auto Descender With Horn and Wheel
配件 Accessory	YAH030
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.64 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX.440 lbs/ 200 kg
下降速度 Absell ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



品名 Name	Aluminum Auto Descender With Horn and Wheel
配件 Accessory	YIH019ND
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.94 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX.440 lbs/ 200 kg
下降速度 Absell ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



AUTO

DESCENDER SERIES



YAE200

品名 Name	Aluminum Auto Descender
配件 Accessory	YAH030
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.05 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX.440 lbs/ 200 kg
下降速度 Absell ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



品名 Name	Aluminum Auto Descender
配件 Accessory	YIH019ND
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.35 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX.440 lbs/ 200 kg
下降速度 Absell ing Speed	0.8 m/ S-2 m/s
繩降高度 Absell ing Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C





DESCENDER SERIES



YAE100

品名 Name	Aluminum Auto Descender
配件 Accessory	YAH030
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	1.8 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX. 440 lbs/ 200 kg
下降速度 Abseiling Speed	0.8 m/ S-2 m/s
繩降高度 Abseiling Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C



品名 Name	Aluminum Auto Descender
配件 Accessory	YIH019ND
材質 Material	Aluminum / Steel / Stainless steel Alloy
重量 Weight(g)	2.1 kg
繩索尺寸 Rope Size	Ø9.5 mm
額定負載 Min. Rated Load	MIN. 110 lbs/ 50 kg MAX. 440 lbs/ 200 kg
下降速度 Abseiling Speed	0.8 m/ S-2 m/s
繩降高度 Abseiling Height	160 m MAX.
最多人數 Max Number of Persons	2
溫度 Temperature	-37C~48C




AUTO

DESCENDER SERIES






BEAM ANCHOR SERIES

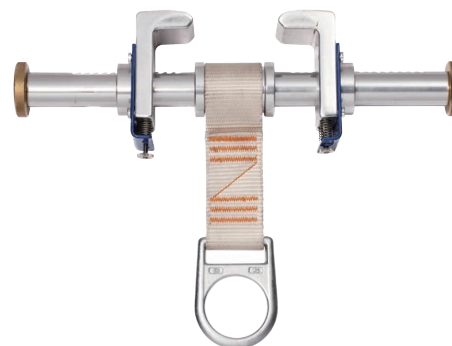


YAA001

品名 Name	Aluminum Fixed Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN
重量 Weight(g)	2220 g
使用寬度 Use	—
樑翼緣寬度測距 I Beam Flange Width Ranging	W 75 - 260 mm (3.0" - 10")
表面處理 Finish	Anodised ●

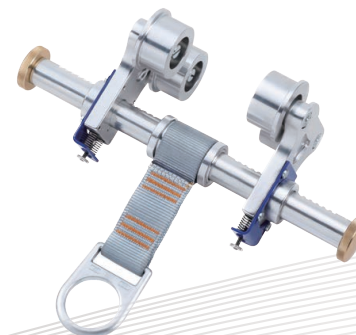

YAA005

品名 Name	Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN
重量 Weight(g)	3535 g
使用寬度 Use	—
樑翼緣寬度測距 I Beam Flange Width Ranging	W 75 - 260 mm (3.0" - 10")
表面處理 Finish	Anodised ●

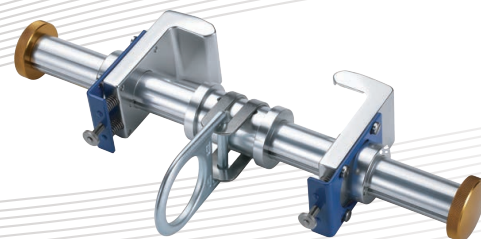


YAA017

品名 Name	Fixed Beam Anchor With U-Shape Fixed Plate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2270 g
使用寬度 Use	—
樑翼緣寬度測距 I Beam Flange Width Ranging	W 75 - 260 mm (3.0" - 10")
表面處理 Finish	Anodised ●



BEAM
ANCHOR



BEAM ANCHOR SERIES



YAA211 12"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2009 g
使用寬度 Use	Width: 2.5" To 12"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-305 mm (2.5"-12")
表面處理 Finish	Anodised ● ●




YAA212 18"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2220 g
使用寬度 Use	Width: 2.5" To 18"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-457 mm (2.5"-18")
表面處理 Finish	Anodised ● ●



YAA213 24"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2510 g
使用寬度 Use	Width: 2.5" To 24"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-610 mm (2.5"-24")
表面處理 Finish	Anodised ● ●

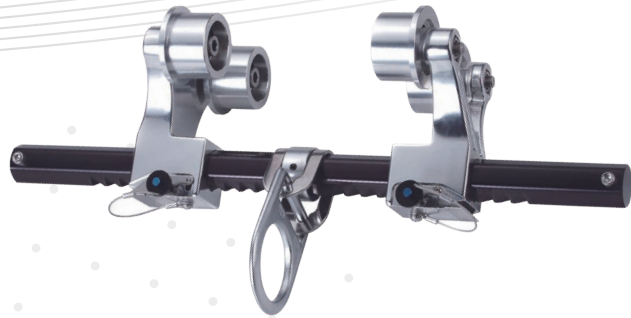

YAA231 12"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3000 g
使用寬度 Use	Width: 2.5" To 12"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-305 mm (2.5"-12")
表面處理 Finish	Anodised ● ●



YAA232 18"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3280 g
使用寬度 Use	Width: 2.5" To 18"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-457 mm (2.5"-18")
表面處理 Finish	Anodised ● ●



YAA233 24"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3560 g
使用寬度 Use	Width: 2.5" To 24"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-610 mm (2.5"-24")
表面處理 Finish	Anodised ● ●



YAA003 12"

品名 Name	Vertical Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	3025 g
使用寬度 Use	—
樑翼緣寬度測距 I Beam Flange Width Ranging	W 125-300 mm (5.0"-12")
表面處理 Finish	Anodised ● ●



YAA531 3"

品名 Name	Single Sliding Beam Trolley
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight(g)	2000 g
使用寬度 Use	—
樑翼緣寬度測距 I Beam Flange Width Ranging	W 76.20 mm (3")
表面處理 Finish	Anodised ● ●

BEAM
ANCHOR



YAA141 12"

品名 Name	Vertical and Horizontal Beam
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2540 g
使用寬度 Use	Width: 2.5" To 12"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-305 mm (2.5"-12")
表面處理 Finish	Anodised ● ●



YAA142 18"

品名 Name	Vertical and Horizontal Beam
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2830 g
使用寬度 Use	Width: 2.5" To 18"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-457 mm (2.5"-18")
表面處理 Finish	Anodised ● ●



YAA143 24"

品名 Name	Vertical and Horizontal Beam
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	3120 g
使用寬度 Use	Width: 2.5" To 24"
樑翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-610 mm (2.5"-24")
表面處理 Finish	Anodised ● ●



NEW PRODUCT BEAM ANCHOR SERIES



YAA251 12"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2009 g
使用寬度 Use	Width: 2.5" To 12"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-305 mm (2.5"-12")
表面處理 Finish	Anodised ● ●



YAA252 18"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2220 g
使用寬度 Use	Width: 2.5" To 18"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-457 mm (2.5"-18")
表面處理 Finish	Anodised ● ●



YAA253 24"

品名 Name	Dual Sliding Beam Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
重量 Weight(g)	2510 g
使用寬度 Use	Width: 2.5" To 24"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-610 mm (2.5"-24")
表面處理 Finish	Anodised ● ●



YAA261 12"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3000 g
使用寬度 Use	Width: 2.5" To 12"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-305 mm (2.5"-12")
表面處理 Finish	Anodised ● ●



YAA262 18"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3280 g
使用寬度 Use	Width: 2.5" To 18"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-457 mm (2.5"-18")
表面處理 Finish	Anodised ● ●



YAA263 24"

品名 Name	Mobile (Rolling) Type Two-Clamp Sliding
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN
重量 Weight (g)	3560 g
使用寬度 Use	Width: 2.5" To 24"
橫翼緣寬度測距 I Beam Flange Width Ranging	W 63.5-610 mm (2.5"-24")
表面處理 Finish	Anodised ● ●



INSTAGRAM

BEAM ANCHOR SERIES

CHALLENGE YOURSELF. MAKE YOU GREAT.
FORGING EXPERTISE IN STEEL AND ALUMINUM.





SRL + TRIPOD SERIES



MYU002

(Webbing Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YAH011D
斷裂強度 Breaking Strength	15 kN
重量 Weight(g)	1450 g
繩寬 Webbing	45mm Nylon Web
繩帶長度 Safe Webbing Size	2.5 m
安全工作負荷 Safe Working Load	100kg



MYU003

(Webbing Type)


品名 Name	Self-Retracting Lifeline
件配 Accessory	YAH013
斷裂強度 Breaking Strength	15 kN
重量 Weight(g)	1260 g
繩寬 Webbing	20mm Dyneema Web.
繩帶長度 Safe Webbing Size	3 m
安全工作負荷 Safe Working Load	100 kg



MYU006W

(Webbing Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	15 kN
重量 Weight(g)	2000 g
繩寬 Webbing	19 mm Dyneema Web.
繩帶長度 Safe Webbing Size	6 m
安全工作負荷 Safe Working Load	100kg

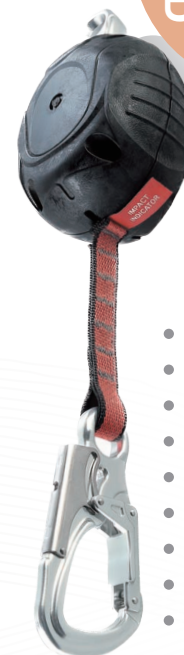

SRL
TRIPOD

MYU006 (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	4200 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm White Zinc Cable
電纜長度 Cable Length	6 m
安全工作負荷 Safe Working Load	140 kg
CE	

MYU006S (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	4200 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm Stainless Steel Cable
電纜長度 Cable Length	6 m
安全工作負荷 Safe Working Load	140 kg
CE	

MYU010 (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	4200 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm White Zinc Cable
電纜長度 Cable Length	10 m
安全工作負荷 Safe Working Load	140 kg
CE	

MYU010S (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	4600 g
電纜尺寸和材料 Cable Size And Material	Ø4.8mm Stainless Steel Cable
電纜長度 Cable Length	10 m
安全工作負荷 Safe Working Load	140kg
CE	



MYU015 (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	6100 kg
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm White Zinc Cable
電纜長度 Cable Length	15 m
安全工作負荷 Safe Working Load	100 kg
CE	

MYU015S (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	MYU015
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	6100 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm Stainless Steel Cable
電纜長度 Cable Length	15 m
安全工作負荷 Safe Working Load	100kg
CE	

MYU020 (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	6600 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm White Zinc Cable
電纜長度 Cable Length	20 m
安全工作負荷 Safe Working Load	100 kg
CE	

MYU020S (Cable Type)

品名 Name	Self-Retracting Lifeline
件配 Accessory	YIH051
斷裂強度 Breaking Strength	12 kN
重量 Weight(g)	6600 g
電纜尺寸和材料 Cable Size And Material	Ø4.8 mm Stainless Steel Cable
電纜長度 Cable Length	20 m
安全工作負荷 Safe Working Load	100 kg
CE	

SRL TRIPOD



YAS001T30

品名 Name	Bolt Anchor - 3 mm
材質 Material	Stainless Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN
重量 Weight (g)	47 g
直徑 Dia.	12 mm
尺寸 Size	W 67 mm x L 30.4 mm
表面處理 Finish	Polishing ●

YAS001T40

品名 Name	Bolt Anchor - 4 mm
材質 Material	Stainless Steel Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN
重量 Weight (g)	60 g
直徑 Dia.	12 mm
尺寸 Size	W 67 mm x L 30.4 mm
表面處理 Finish	Polishing ●



YAS002

品名 Name	Bolt Anchor - 4 mm
材質 Material	Stainless Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN
重量 Weight (g)	72 g
直徑 Dia.	12 mm
尺寸 Size	W 39.7 mm x L 84.4 mm
表面處理 Finish	Polishing ●



YAA016

品名 Name	Aluminum Pole Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
配件型號 Accessory	YAH001
重量 Weight (g)	480 g
總長 Pole Length	3m / 5m / 7m
尺寸 Size	W 110mm x L 223mm
表面處理 Finish	Anodised ●



YAA015

品名 Name	Aluminum Pole Anchor
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN
配件型號 Accessory	YAH006
重量 Weight (g)	930 g
總長 Pole Length	3 m / 5 m / 7m
尺寸 Size	W 125 mm x L 340 mm
表面處理 Finish	Anodised ●





ASCENDER SERIES

ALUMINUM



YAS11L

品名 Name	Ascender-Left Hand
材質 Material	Aluminum Alloy
重量 Weight (g)	177g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 86 mm x L 190 mm
安全工作負荷 Safe Working Load	140 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAS11R

品名 Name	Ascender-Right Hand
材質 Material	Aluminum Alloy
重量 Weight (g)	177 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 86 mm x L 190 mm
安全工作負荷 Safe Working Load	140 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAS11D

品名 Name	Double Hand Ascender
材質 Material	Aluminum Alloy
重量 Weight (g)	390 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 158 mm x L 190 mm
安全工作負荷 Safe Working Load	140 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAS11B

品名 Name	Basic Ascender
材質 Material	Aluminum Alloy
重量 Weight (g)	122 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 68 mm x L 110 mm
安全工作負荷 Safe Working Load	100 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors



ASCENDER
SERIES





AESCENDER SERIES

ALUMINUM



YAS30L

品名 Name	Chest Ascender
材質 Material	Aluminum Alloy
重量 Weight (g)	110 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 73 mm x L 108 mm
安全工作負荷 Safe Working Load	140 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors



AESCENDER
SERIES



YAS11X(Left)

品名 Name	Foot Ascender-Left
材質 Material	Aluminum Alloy
重量 Weight (g)	106 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 76 mm x L 47 mm
安全工作負荷 Safe Working Load	100 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAS11Y(Right)

品名 Name	Foot Ascender-Right
材質 Material	Aluminum Alloy
重量 Weight (g)	106 g
繩索尺寸 Rope Size	Ø8-13 mm
尺寸 Size	W 76 mm x L 47 mm
安全工作負荷 Safe Working Load	100 kg
表面處理 Finish	Anodised ●●●●● Customizable Colors

www.hooks.com.tw

NAL HON
industrial co., LTD

We committed to quality and safety
for adventurers and workers at
height.

OUR FACTORY

CHALLENGE YOURSELF. MAKE YOU GREAT.
FORGING EXPERTISE IN STEEL AND ALUMINUM.

AESCENDER SERIES



INSTAGRAM



PULLEY SERIES

ALUMINUM

Steel

PULLEY
SERIES

YSP004

品名 Name	Tandem Pulley With SUS Sheave, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	283 g
直徑 Dia.	Cable / Rope 12 mm
尺寸 Size	W 108 mm x L 78.5 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

CE

YAP005

品名 Name	Double-Wheel With Alu. Sheave, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	434 g
直徑 Dia.	Rope 16 mm
尺寸 Size	W 83 mm x L 151.5 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

CE

YAP006

品名 Name	Single-Wheel With Alu. Sheave, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	251 g
直徑 Dia.	Rope 16 mm
尺寸 Size	W 83 mm x L 124 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

CE

YSP008

品名 Name	Single-Wheel With SUS Wheel, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	20 kN/ 4496 lbs
重量 Weight (g)	251 g
直徑 Dia.	Rope 12 mm
尺寸 Size	W 45 mm x L 83 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

CE

**YAP021**

品名 Name	Double-Wheel With Alu. Sheave, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	405 g
直徑 Dia.	Rope 8 -13 mm
尺寸 Size	W 138 mm x L 72.7 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

**YAP022**


品名 Name	Single-Wheel With Alu. Sheave, Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	212 g
直徑 Dia.	Rope 8 -13 mm
尺寸 Size	W 110 mm x L 72.7 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

**YAP010 YIP010**

品名 Name	Handle Trolley Pulley With Stainless Sheave Ball Bearing
材質 Material	Aluminum Alloy / High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7800 lbs 45 kN/ 10000 lbs
重量 Weight (g)	1945 g
直徑 Dia.	Rope 9-13 mm
尺寸 Size	W 310 mm x L 178 mm
表面處理 Finish	Anodised ●● ED-Coating Black ●●

**YAP011**

品名 Name	Single Pulley Ball Bearing
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	120 g
直徑 Dia.	Rope 13 mm
尺寸 Size	W 58 mm x L 79.4 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

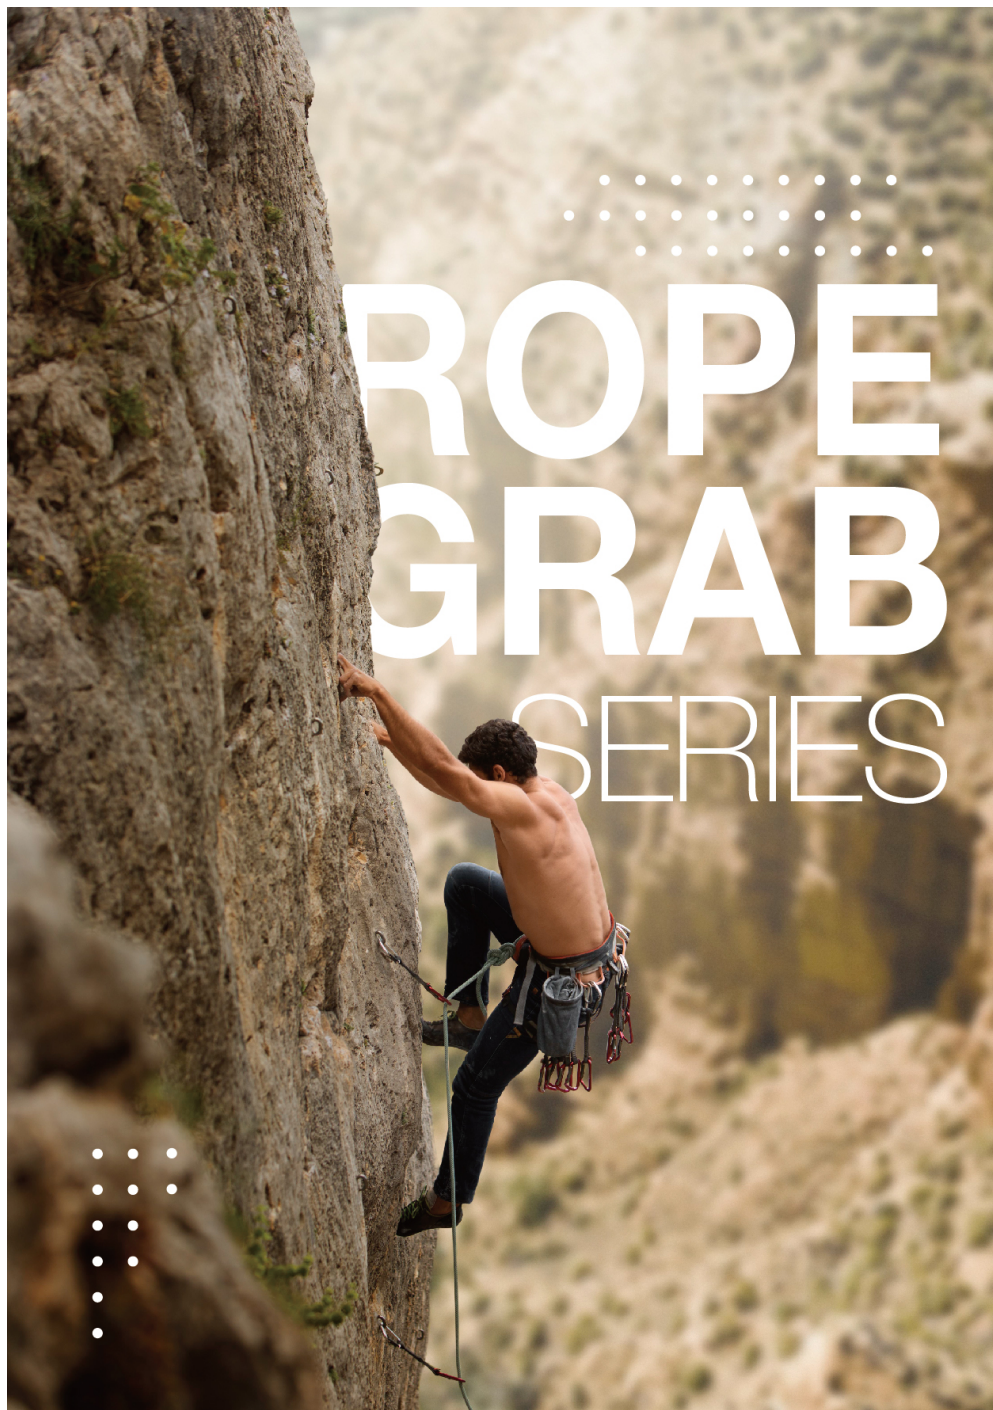

ROPE GRAB SERIES

STEEL Aluminum



YIG001

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15kN / 3372LBS
重量 Weight (g)	311g
尺寸 Size	W 105mm x L 94mm
繩索尺寸 Rope Size	Ø12mm
孔洞尺寸 Eye Size	28mm



YIG002

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15kN / 3372LBS
重量 Weight (g)	450g
尺寸 Size	W 105mm x L 68mm
繩索尺寸 Rope Size	Ø12mm
孔洞尺寸 Eye Size	20mm



YIG004

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15kN / 3372LBS
重量 Weight (g)	473g
尺寸 Size	W 99mm x L 98mm
繩索尺寸 Rope Size	Ø12mm / Ø16mm
孔洞尺寸 Eye Size	21mm

CE



YIG006

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15kN / 3372LBS
重量 Weight (g)	570g
尺寸 Size	W 80mm x L 168mm
繩索尺寸 Rope Size	Ø16mm
孔洞尺寸 Eye Size	54mm

ROPE GRAB SERIES

**YIG009 Ø8mm**

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	480 g
尺寸 Size	W 131 mm x L 74 mm
繩索尺寸 Rope Size	Ø8 mm
孔洞尺寸 Eye Size	11 mm
表面處理 Finish	Nickel Chrome ●



Anti Up Side Down

**YIG017 Ø12mm**

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	594 g
尺寸 Size	W 131 mm x L 74 mm
繩索尺寸 Rope Size	Ø12 mm
孔洞尺寸 Eye Size	11 mm
表面處理 Finish	Nickel Chrome ●

YIG016 Ø8mm

品名 Name	Steel Cable Rope Grab With Anti Up-Side Down
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	494 g
尺寸 Size	W 140 mm x L 75 mm
繩索尺寸 Rope Size	Ø8 mm
孔洞尺寸 Eye Size	11 mm
表面處理 Finish	Nickel Chrome ●

**YIG011 Ø11-12mm**

品名 Name	Steel Rope Grab
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	360 g
尺寸 Size	W 83 mm x L 68 mm
繩索尺寸 Rope Size	Ø11-12 mm
孔洞尺寸 Eye Size	20 mm
表面處理 Finish	Yellow Zinc ●

**YSG010 Ø13-16mm**

品名 Name	Stainless Steel Rope Grab
材質 Material	Stainless Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	342 g
尺寸 Size	W 103 mm x L 92 mm
繩索尺寸 Rope Size	Ø13-16 mm
孔洞尺寸 Eye Size	25 mm
表面處理 Finish	Polishing ●

**YSG020 Ø14mm**

品名 Name	Stainless Steel Rope Grab
材質 Material	Stainless Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN / 3372 lbs
重量 Weight (g)	256 g
尺寸 Size	W 130 mm x L 103 mm
繩索尺寸 Rope Size	Ø14 mm
孔洞尺寸 Eye Size	14 mm
表面處理 Finish	Polishing ●

**YAG001 Ø12mm**

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	240 g
尺寸 Size	W 72 mm x L 90 mm
繩索尺寸 Rope Size	Ø12 mm
孔洞尺寸 Eye Size	16 mm
表面處理 Finish	Anodised ● Customizable Colors ●

**YAG002 Ø14mm**

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	243 g
尺寸 Size	W 72 mm x L 90 mm
繩索尺寸 Rope Size	Ø14 mm
孔洞尺寸 Eye Size	16 mm
表面處理 Finish	Anodised ● Customizable Colors ●

YAG003 Ø16mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	218 g
尺寸 Size	W 72 mm x L 90 mm
繩索尺寸 Rope Size	Ø16 mm
孔洞尺寸 Eye Size	16 mm
表面處理 Finish	Anodised ● Customizable Colors ●

WHAT DIFFERENT



ROPE GRAB SERIES



YAG008 Ø11-13mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	178 g
尺寸 Size	W 85 mm x L 77 mm
繩索尺寸 Rope Size	Ø11-13 mm
孔洞尺寸 Eye Size	17 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



YAG009 Ø11-13mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	170 g
尺寸 Size	W 85 mm x L 77 mm
繩索尺寸 Rope Size	Ø11-13 mm
孔洞尺寸 Eye Size	17 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



YAG010 Ø11-13mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	168 g
尺寸 Size	W 85 mm x L 70 mm
繩索尺寸 Rope Size	Ø11-13 mm
孔洞尺寸 Eye Size	17 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



YAG011 Ø11-13mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	178 g
尺寸 Size	W 85 mm x L 70 mm
繩索尺寸 Rope Size	Ø11-13 mm
孔洞尺寸 Eye Size	17 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



YAG020 Ø11-13mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	173 g
尺寸 Size	W 75 mm x L 70 mm
繩索尺寸 Rope Size	Ø11-13 mm
孔洞尺寸 Eye Size	22 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



YAG004 Ø11-12.5mm

品名 Name	Aluminum Rope Grab
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	—
重量 Weight (g)	174 g
尺寸 Size	W 66 mm x L 114 mm
繩索尺寸 Rope Size	Ø11-12.5 mm
孔洞尺寸 Eye Size	16 mm
表面處理 Finish	Anodised ●●●●●● Customizable Colors



ROPE GRAB
SERIES

DESCENDER SERIES



DESCENDER SERIES



YIE001

品名 Name	Steel figure 8 descender
材質 Material	High Tensile Steel Alloy
重量 Weight (g)	320g
繩索尺寸 Rope Size	Ø9-16mm
尺寸 Size	W 145mm x L 125mm
最小斷裂強度 Minimum Breaking Strength	30kN / 6744LBS
表面處理 Finish	White Zinc ED-Coating Black



YIE002

品名 Name	Steel figure 8 descender
材質 Material	High Tensile Steel Alloy
重量 Weight (g)	664g
繩索尺寸 Rope Size	Ø9-16mm
尺寸 Size	W 171mm x L 171mm
最小斷裂強度 Minimum Breaking Strength	50kN / 11240LBS
表面處理 Finish	ED-Coating Black



YAE001

品名 Name	Aluminum Alloy 8 Descender
材質 Material	Aluminum Alloy
重量 Weight (g)	120g
繩索尺寸 Rope Size	Ø9-12mm
尺寸 Size	W 145mm x L 75mm
最小斷裂強度 Minimum Breaking Strength	35kN / 7868LBS
表面處理 Finish	Anodised Customizable colors



YAE002

品名 Name	Aluminum Alloy 8 Descender
材質 Material	Aluminum Alloy
重量 Weight (g)	270g
繩索尺寸 Rope Size	Ø9-16mm
尺寸 Size	W 171mm x L 171mm
最小斷裂強度 Minimum Breaking Strength	40kN/8992LBS
表面處理 Finish	Anodised Customizable colors



YAE003

品名 Name	Aluminum Alloy 8 Descender
材質 Material	Aluminum Alloy
重量 Weight (g)	110g
繩索尺寸 Rope Size	Ø9-12mm
尺寸 Size	W 100mm x L 100mm
最小斷裂強度 Minimum Breaking Strength	30kN/6744LBS
表面處理 Finish	Anodised Customizable colors

DESCENDER
SERIES






DESCENDER SERIES




YAE004

品名 Name	Belay Tube
材質 Material	Aluminum Alloy
重量 Weight (g)	56 g
繩索尺寸 Rope Size	Ø8-11 mm
尺寸 Size	W 55.5 mm x L 100.5 mm
最小斷裂強度 Minimum Breaking Strength	2 kN / 449 lbs
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

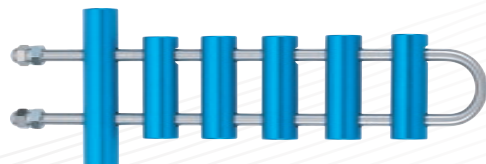

YAE005

品名 Name	Belay Device
材質 Material	Aluminum Alloy
重量 Weight (g)	1000 g
繩索尺寸 Rope Size	Ø9-12 mm
尺寸 Size	W 113 mm x L 360 mm
最小斷裂強度 Minimum Breaking Strength	44.6 kN / 10000 lbs
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

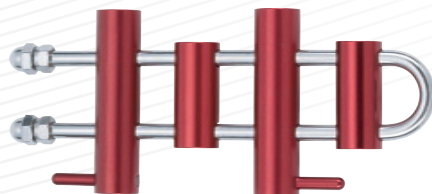

YAE006

品名 Name	Belay Device
材質 Material	Aluminum Alloy
重量 Weight (g)	434 g
繩索尺寸 Rope Size	Ø9-12 mm
尺寸 Size	W 89 mm x L 212 mm
最小斷裂強度 Minimum Breaking Strength	44.6 kN / 10000 lbs
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



YAE008

品名 Name	Handy Descender
材質 Material	Aluminum Alloy
重量 Weight (g)	430 g
繩索尺寸 Rope Size	Ø10-12 mm
尺寸 Size	W 60 mm x L 240 mm
安全工作負荷 Safe Working Load	150 kg
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



DESCENDER SERIES

DESCENDER SERIES

NAL HON
industrial co., LTD

We committed to quality and safety
for adventurers and workers at
height.

OUR FACTORY

CHALLENGE YOURSELF. MAKE YOU GREAT.
FORGING EXPERTISE IN STEEL AND ALUMINUM



INSTERGRAM



STEEL HOOK SERIES

STEEL


Wire

Aluminum



YIH001

品名 Name	Big Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	483 g
開口 Opening	54 mm
尺寸 Size	W 119 mm x L 215 mm
表面處理 Finish	Yellow Zinc White Zinc Nickel Chrome




SNAP
HOOK



YIH002

品名 Name	Double Action Steel Gate
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	560 g
開口 Opening	58 mm
尺寸 Size	W 118 mm x L 223 mm
表面處理 Finish	Yellow Zinc




YIH006

品名 Name	Steel Light Scaffold Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	350 g
開口 Opening	54 mm
尺寸 Size	W 116 mm x L 220 mm
表面處理 Finish	Yellow Zinc







品名 Name	Swivel Steel Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs
重量 Weight (g)	692 g
開口 Opening	55 mm
尺寸 Size	W 124 mm x L 265 mm
表面處理 Finish	Yellow Zinc 




品名 Name	Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	226g
開口 Opening	17 mm
尺寸 Size	W 62mm x L 130mm
表面處理 Finish	Yellow Zinc White Zinc Nickel Chrome



品名 Name	Forged Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN / 5620 lbs
重量 Weight (g)	303g
開口 Opening	21 mm
尺寸 Size	W 59 mm x L 142 mm
表面處理 Finish	Yellow Zinc 





品名 Name	Forged Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	297 g
開口 Opening	21 mm
尺寸 Size	W 62.9 mm x L 155.3 mm
表面處理 Finish	Yellow Zinc 




SNAP HOOK



品名 Name	Swivel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	409g
開口 Opening	19 mm
尺寸 Size	W 58 mm x L 179 mm
表面處理 Finish	Yellow Zinc 

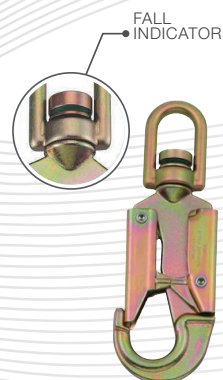

品名 Name	Swivel Hook With Indicator
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	403g
開口 Opening	19 mm
尺寸 Size	W 64 mm x L 178.5 mm
表面處理 Finish	Yellow Zinc 





SCREW LOCK
YIH019S

品名 Name	Swivel Hook With Screw Lock
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	392 g
開口 Opening	24 mm
尺寸 Size	W 79 mm x L 174 mm
表面處理 Finish	White Zinc



SCREW LOCK
YIH020S

品名 Name	Snap Hook With Screw Lock
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN, 7 kN
重量 Weight (g)	284 g
開口 Opening	21 mm
尺寸 Size	W 79 mm x L 140 mm
表面處理 Finish	White Zinc



TWIST LOCK **YIH019D** **TRIPLE LOCK** **YIH019T**

品名 Name	Swivel Hook With Auto Lock
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	391 g
開口 Opening	25 mm
尺寸 Size	W 79 mm x L 174 mm
表面處理 Finish	White Zinc



TWIST LOCK **YIH020D** **TRIPLE LOCK** **YIH020T**

品名 Name	Snap Hook With Auto Lock
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN, 7 kN
重量 Weight (g)	300 g
開口 Opening	21 mm
尺寸 Size	W 79 mm x L 140 mm
表面處理 Finish	White Zinc




TWIST LOCK **YIH019ND** **TRIPLE LOCK** **YIH019NT**

品名 Name	Snap Hook With Auto Lock
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
鎖口強度 Gate Strength	3600 lbs
重量 Weight (g)	449 g
開口 Opening	25 mm
尺寸 Size	W 79 mm x L 174 mm
表面處理 Finish	White Zinc



YIH023

品名 Name	Forged Steel Double Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	258 g
開口 Opening	17 mm
尺寸 Size	W 60 mm x L 135 mm
表面處理 Finish	Yellow Zinc




SNAP HOOK



YIH041

品名 Name	Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
鎖口強度 Gate Strength	3600 lbs
重量 Weight (g)	377 g
開口 Opening	18 mm
尺寸 Size	W 69 mm x L 149 mm
表面處理 Finish	Yellow Zinc



YIH044

品名 Name	Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
鎖口強度 Gate Strength	3600 lbs
重量 Weight (g)	483 g
開口 Opening	19 mm
尺寸 Size	W 66 mm x L 195 mm
表面處理 Finish	Yellow Zinc



STEEL HOOK SERIES

STEEL


Wire

Aluminum




YIH050

品名 Name	Steel Double Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	200 g
開口 Opening	19 mm
尺寸 Size	W 61.5 mm x L 129 mm
表面處理 Finish	Yellow Zinc White Zinc




YIH051

品名 Name	Swivel Steel Snap Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	363 g
開口 Opening	20 mm
尺寸 Size	W 57 mm x L 177 mm
表面處理 Finish	White Zinc



YIH052

品名 Name	Double Action Scaffold Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
鎖口強度 Gate Strength	3600 lbs
重量 Weight (g)	811 g
開口 Opening	64 mm
尺寸 Size	W 147 mm x L 241 mm
表面處理 Finish	Yellow Zinc



YIW001

品名 Name	Steel Wire Hook
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	851 g
開口 Opening	85 mm
尺寸 Size	W 154 mm x L 335mm
表面處理 Finish	Nickel Chrome 



YAW001

品名 Name	Wire Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	20 kN/ 4496 lbs
重量 Weight (g)	360 g
開口 Opening	60 mm
尺寸 Size	W 140 mm x L 268 mm
表面處理 Finish	Anodised Customizable Colors


YAW002

品名 Name	Wire Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	20 kN/ 4496 lbs
重量 Weight (g)	488 g
開口 Opening	86 mm
尺寸 Size	W 175 mm x L 350 mm
表面處理 Finish	Anodised Customizable Colors


SNAP HOOK




品名 Name	Scaffold Hook With SS Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs
重量 Weight (g)	480 g
開口 Opening	60 mm
尺寸 Size	W 123 mm x L 234 mm
表面處理 Finish	Anodised     Customizable Colors



品名 Name	Scaffold Hook With SUS Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	511 g
開口 Opening	64 mm
尺寸 Size	W 129 mm x L 250 mm
表面處理 Finish	Anodised     Customizable Colors




品名 Name	Forged Aluminum Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN / 7868 lbs
重量 Weight (g)	459 g
開口 Opening	58 mm
尺寸 Size	W 127.5 mm x L 244 mm
表面處理 Finish	Anodised     Customizable Colors




YAH006

品名 Name	Extra Large Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	993 g
開口 Opening	110 mm
尺寸 Size	W 186 mm x L 359 mm
表面處理 Finish	Anodised     Customizable Colors




YAH008

品名 Name	Snap Hook With SUS Gate		
材質 Material	Aluminum Alloy		
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs		
重量 Weight (g)	157 g		
開口 Opening	20 mm		
尺寸 Size	W 68 mm x L 158 mm		
表面處理 Finish	Anodised     Customizable Colors		



YAH009


品名 Name	Snap Hook With SUS Gate		
材質 Material	Aluminum Alloy		
最小斷裂強度 Minimum Breaking Strength	23 kN/	5170 lbs	
重量 Weight (g)	161 g		
開口 Opening	20 mm		
尺寸 Size	W 65 mm x L 136 mm		
表面處理 Finish	Anodised	  	 
		Customizable Colors	




SNAP HOOK


YAH011S SCREW LOCK


品名 Name	Swivel Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	214 g
開口 Opening	22 mm
尺寸 Size	W 79 mm x L 174 mm
表面處理 Finish	Anodised ● Customizable Colors


YAH012S SCREW LOCK


品名 Name	Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	107 g
開口 Opening	22 mm
尺寸 Size	W 79.4 mm x L 139 mm
表面處理 Finish	Anodised ● Customizable Colors


YAH011D TWIST LOCK


品名 Name	Swivel Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	222 g
開口 Opening	22 mm
尺寸 Size	W 79 mm x L 174 mm
表面處理 Finish	Anodised ● Customizable Colors


YAH012D TWIST LOCK


品名 Name	Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	112 g
開口 Opening	22 mm
尺寸 Size	W 79.4 mm x L 139 mm
表面處理 Finish	Anodised ● Customizable Colors


YAH011T TRIPLE LOCK

品名 Name	Swivel Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	222 g
開口 Opening	22 mm
尺寸 Size	W 79mm x L 174 mm
表面處理 Finish	Anodised ● Customizable Colors


YAH012T TRIPLE LOCK

品名 Name	Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	114 g
開口 Opening	22 mm
尺寸 Size	W 78 mm x L 139 mm
表面處理 Finish	Anodised ● Customizable Colors






ALUMINUM HOOK SERIES




YAHO13


品名 Name	Aluminum Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	125 g
開口 Opening	22 mm
尺寸 Size	W 72 mm x L 138 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

YAHO15 SCREW LOCK

品名 Name	Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs
重量 Weight (g)	188 g
開口 Opening	19 mm
尺寸 Size	W 81 mm x L 135 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

YAHO16D TWIST LOCK

品名 Name	Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	82 g
開口 Opening	10 mm
尺寸 Size	W 67 mm x L 84 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



Steel


Wire

ALUMINUM




YAH022

品名 Name	Snap Hook With 3600 lbs Steel Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5170 lbs
重量 Weight (g)	131 g
開口 Opening	22mm
尺寸 Size	W 68 mm x L 160 mm
鎖口強度 Gate Strength	3600 lbs
表面處理 Finish	Anodised ● ● ● ● Customizable Colors

SNAP
HOOK

YAH030

品名 Name	Aluminum Snap Hook
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6740 lbs
重量 Weight (g)	132 g
開口 Opening	24 mm
尺寸 Size	W 70.8 mm x L 135 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



NAL HON INDUSTRIAL CO., LTD.



www.hooks.com.tw



STEEL CARABINER SERIES

STEEL


Aluminum

SCREW LOCK

YIC001S

SCREW LOCK WITH PIN

YIC001S-CP



品名 Name	Oval Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	165 g
開口 Opening	18 mm
尺寸 Size	W 59 mm x L 110 mm
表面處理 Finish	Yellow Zinc White Zinc ED-Coating
	CE

TWIST LOCK


TRIPLE LOCK

YIC001D
YIC001T

TWIST LOCK WITH PIN

TRIPLE LOCK WITH PIN

YIC001D-CP
YIC001T-CP



品名 Name	Oval Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	165 g
開口 Opening	19 mm
尺寸 Size	W 59 mm x L 110 mm
表面處理 Finish	Yellow Zinc White Zinc ED-Coating
	CE

TWIST LOCK


TRIPLE LOCK

YIC001ND
YIC001NT

TWIST LOCK WITH PIN


TRIPLE LOCK WITH PIN

YIC001ND-CP
YIC001NT-CP




品名 Name	Oval Carabiner With 3600 lbs Steel Gate
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	165 g
開口 Opening	19 mm
尺寸 Size	W 59 mm x L 110 mm
鎖口強度 Gate Strength	3600 lbs
表面處理 Finish	Yellow Zinc White Zinc ED-Coating
	ANSI

CARABINER
SERIES

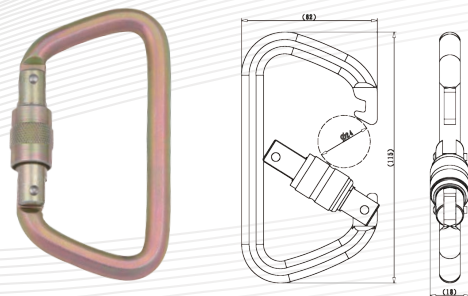


YIC002S SCREW LOCK
YIC002D TWIST LOCK
YIC002T TRIPLE LOCK

品名 Name	D Shape Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7686 lbs 9 kN, 16 kN
重量 Weight (g)	180 g
開口 Opening	24 mm
尺寸 Size	W 62 mm x L 115 mm
表面處理 Finish	Yellow Zinc White Zinc ED-Coating

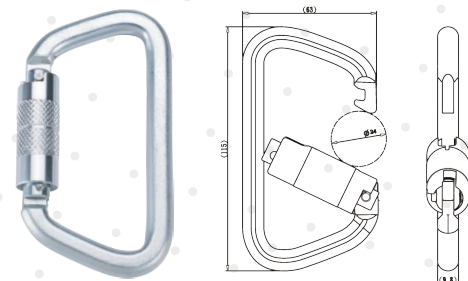

YIC002ND TWIST LOCK
YIC002NT TRIPLE LOCK

品名 Name	D Shape Carabiner With 3600 lbs Steel Gate
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7686 lbs 9 kN, 16 kN
重量 Weight (g)	180 g
開口 Opening	24 mm
尺寸 Size	W 63 mm x L 115 mm
鎖口強度 Gate Strength	3600 lbs
表面處理 Finish	Yellow Zinc White Zinc ED-Coating

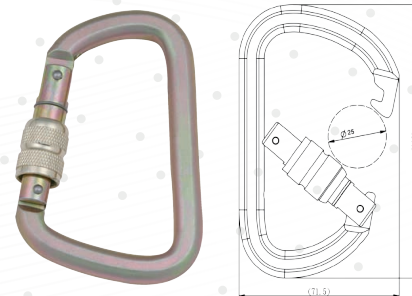


SCREW LOCK
TWIST LOCK
TRIPLE LOCK

YIC003S
YIC003D
YIC003T

SCREW LOCK WITH PIN
TWIST LOCK WITH PIN
TRIPLE LOCK WITH PIN

YIC003S-CP
YIC003D-CP
YIC003T-CP

品名 Name	D Shape Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7686 lbs 7 kN, 7 kN
重量 Weight (g)	210 g
開口 Opening	25 mm
尺寸 Size	W 71.5 mm x L 113 mm
表面處理 Finish	Yellow Zinc White Zinc ED-Coating

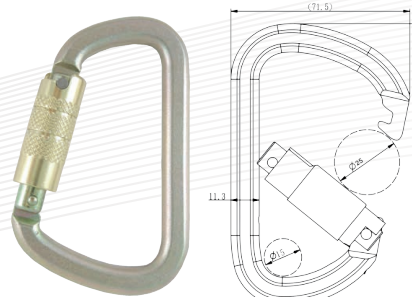

TWIST LOCK
TRIPLE LOCK

YIC003ND
YIC003NT

TWIST LOCK WITH PIN
TRIPLE LOCK WITH PIN

YIC003ND-CP
YIC003NT-CP

品名 Name	D Shape Carabiner With 3600 lbs Steel Gate
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7686 lbs
重量 Weight (g)	210 g
開口 Opening	25 mm
尺寸 Size	W 71.5 mm x L 114 mm
鎖口強度 Gate Strength	3600 lbs
表面處理 Finish	Yellow Zinc White Zinc ED-Coating




CARABINER
SERIES

NAL HON INDUSTRIAL CO., LTD.


CARABINER

SERIES




YIC005S SCREW LOCK
YIC005D TWIST LOCK

品名 Name	D Shape Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	50 kN/ 11240 lbs 9 kN, 8 kN
重量 Weight (g)	205 g
開口 Opening	16 mm
尺寸 Size	W 61 mm x L 106 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



YIC006S SCREW LOCK

品名 Name	Super Strong Steel Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	50 kN/ 11240 lbs 10 kN, 7 kN
重量 Weight (g)	265 g
開口 Opening	24 mm
尺寸 Size	W 77 mm x L 119 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●





YIC006D TWIST LOCK
YIC006T TRIPLE LOCK


品名 Name	Super Strong Steel Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	50 kN/ 11240 lbs 10 kN, 7 kN
重量 Weight (g)	265 g
開口 Opening	24 mm
尺寸 Size	W 77 mm x L 119 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



YIC008S YIC008S-CP
YIC008D YIC008D-CP
YIC008T YIC008T-CP




品名 Name	Steel Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6744 lbs 9 kN, 15 kN
重量 Weight (g)	230 g
開口 Opening	28 mm
尺寸 Size	W 79 mm x L 125 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



YIC008ND YIC008ND-CP
YIC008NT YIC008NT-CP

品名 Name	Steel Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6744 lbs
重量 Weight (g)	280 g
開口 Opening	26 mm
尺寸 Size	W 81 mm x L 124 mm
鎖口強度 Gate Strength	3600 lbs
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●




YIC020S SCREW LOCK

品名 Name	Oval Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	28 kN
重量 Weight (g)	160 g
開口 Opening	16 mm
尺寸 Size	W 60 mm x L 106 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●




CARABINER
SERIES




YIC015S SCREW LOCK

品名 Name	D Shape Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	50 kN/ 11240 lbs 16 kN, 8 kN
重量 Weight (g)	240 g
開口 Opening	27 mm
尺寸 Size	W 77 mm x L 120 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●




YIC015D TWIST LOCK

品名 Name	D Shape Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	50 kN/ 11240 lbs 16 kN, 8 kN
重量 Weight (g)	249 g
開口 Opening	27 mm
尺寸 Size	W 77 mm x L 120 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●




YSC018T TRIPLE LOCK YSC018T-CP TRIPLE LOCK WITH PIN

品名 Name	Stainless Steel Large Carabiner With Square
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	40 kN/ 8992 lbs 9 kN With Pin 35 kN
重量 Weight (g)	267 g
開口 Opening	28 mm
尺寸 Size	W 81mm x L 114 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



YIC023S SCREW LOCK

品名 Name	Oval Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN, 9 kN, 9 kN
重量 Weight (g)	170 g
開口 Opening	20 mm
尺寸 Size	W 58 mm x L 107 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



YIC023D TWIST LOCK

YIC023T TRIPLE LOCK

品名 Name	Oval Carabiner
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN, 9 kN, 9 kN
重量 Weight (g)	190 g
開口 Opening	YIC023D - 19 mm YIC023T - 20 mm
尺寸 Size	W 58 mm x L 107 mm
表面處理 Finish	Yellow Zinc ● White Zinc ● ED-Coating ●



CARABINER
SERIES

CARABINER
SERIES

YAC001S SCREW LOCK
YAC001D TWIST LOCK
YAC001T TRIPLE LOCK

品名 Name	Oval Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	79 g
開口 Opening	YAC001S - 19 mm YAC001D - 20 mm YAC001T - 20 mm
尺寸 Size	W 61 mm x L 111 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



YAC012S SCREW LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	91 g
開口 Opening	25 mm
尺寸 Size	W 73 mm x L 116 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



YAC012D TWIST LOCK
YAC012T TRIPLE LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	98 g
開口 Opening	YAC012D - 24 mm YAC012T - 25 mm
尺寸 Size	W 73 mm x L 116 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



YAC015S SCREW LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/6744 lbs 8 kN, 10 kN
重量 Weight (g)	82 g
開口 Opening	22 mm
尺寸 Size	W 73 mm x L 112 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



YAC015D TWIST LOCK
YAC015T TRIPLE LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/6744 lbs 8 kN, 10 kN
重量 Weight (g)	88 g
開口 Opening	22 mm
尺寸 Size	W 73 mm x L 112 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



SCREW LOCK SCREW LOCK WITH PIN
YAC016S YAC016S-CP

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 8 kN, 7 kN
重量 Weight (g)	95 g
開口 Opening	22 mm
尺寸 Size	W 73 mm x L 111 mm
表面處理 Finish	Anodised ● ● ● ● Customizable Colors



TWIST LOCK **TWIST LOCK WITH PIN**
YAC016D YAC016D-CP

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 8 kN, 7 kN
重量 Weight (g)	100 g
開口 Opening	22mm
尺寸 Size	W 73 mm x L 111 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



SCREW LOCK
YAC017S

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	89 g
開口 Opening	21 mm
尺寸 Size	W 74 mm x L 117 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



TWIST LOCK **TRIPLE LOCK**
YAC017D YAC017T

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	95 g
開口 Opening	21 mm
尺寸 Size	W 74 mm x L 117 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



TWIST LOCK **TWIST LOCK WITH PIN**
YAC024D YAC024D-CP

品名 Name	Carabiner With Twist Lock
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	332g
開口 Opening	50mm
尺寸 Size	W 150mm x L 210mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

SCREW LOCK **SCREW LOCK WITH PIN**
YAC025S YAC025S-CP

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6744 lbs 8 kN, 10 kN
重量 Weight (g)	104 g
開口 Opening	21 mm
尺寸 Size	W 72 mm x L 116 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



TWIST LOCK **TRIPLE LOCK** **TWIST LOCK WITH PIN** **TRIPLE LOCK WITH PIN**
YAC025D YAC025D-CP
YAC025T YAC025T-CP

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6744 lbs 8 kN, 10 kN
重量 Weight (g)	104 g
開口 Opening	21 mm
尺寸 Size	W 72 mm x L 116 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAC026S SCREW LOCK
YAC026D TWIST LOCK
YAC026T TRIPLE LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	40 kN/ 6744 lbs 9 kN, 9 kN
重量 Weight (g)	152 g
開口 Opening	28 mm
尺寸 Size	W 83 mm x L 141 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAC027B STRAIGHT GATE
YAC027S SCREW LOCK
YAC027D TWIST LOCK

品名 Name	Carabiner With straight Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs
重量 Weight (g)	58 g
開口 Opening	23 mm
尺寸 Size	W 66 mm x L 107 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAC030D TWIST LOCK

品名 Name	D Shape Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs 7 kN, 7 kN
重量 Weight (g)	86 g
開口 Opening	21 mm
尺寸 Size	W 70 mm x L 112 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAC034D TWIST LOCK
YAC034D-CP TWIST LOCK WITH PIN

品名 Name	Carabiner With Twist Lock
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 4945 lbs 7 kN, 7 kN
重量 Weight (g)	209 g
開口 Opening	45 mm
尺寸 Size	W 110 mm x L 196 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAC042S SCREW LOCK

品名 Name	Oval Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	24 kN/ 5395 lbs 8 kN, 7 kN
重量 Weight (g)	74 g
開口 Opening	19 mm
尺寸 Size	W 61 mm x L 111 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors

YAC042D TWIST LOCK

品名 Name	Oval Carabiner
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	24 kN/ 5395 lbs 8 kN, 7 kN
重量 Weight (g)	80g
開口 Opening	19 mm
尺寸 Size	W 61mm x L 111mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



ALUMINUM CARABINER SERIES

Steel

ALUMINUM



YAC035BK

品名 Name	Carabiner With Straight Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	46 g
開口 Opening	19 mm
尺寸 Size	W 60 mm x L 99 mm



YAC035VK

品名 Name	Carabiner With Bent Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs 7 kN, 7 kN
重量 Weight (g)	48 g
開口 Opening	22 mm
尺寸 Size	W 60 mm x L 199 mm



YAC037WS

品名 Name	Carabiner With Wire Gate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5620 lbs
重量 Weight (g)	35 g
開口 Opening	25 mm
尺寸 Size	W 57 mm x L 94 mm

CARABINER
SERIES

NAL HON INDUSTRIAL CO., LTD.

www.hooks.com.tw



NAL HON industrial co., LTD

We committed to quality and safety
for adventurers and workers at
height.

OUR FACTORY

CHALLENGE YOURSELF. MAKE YOU GREAT
FORGING EXPERTISE IN STEEL AND ALUMINUM



INSTAGRAM

D-RING
SERIES

STEEL

Aluminum





D-Ring SERIES

YID006



品名 Name	Large D-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	115 g
織帶 Webbing	46 mm
尺寸 Size	W 70 mm x L 78 mm
表面處理 Finish	Nickel Chrome Yellow Zinc



YID022

品名 Name	Triangle Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	56 g
織帶 Webbing	45 mm
尺寸 Size	W 58 mm x L 55 mm
表面處理 Finish	White Zinc

YID009



品名 Name	Large D-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	98 g
織帶 Webbing	50 mm
尺寸 Size	W 68 mm x L 62 mm
表面處理 Finish	Nickel Chrome



YID024

品名 Name	Triangle Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	93 g
織帶 Webbing	45 mm
尺寸 Size	W 100 mm x L 70 mm
表面處理 Finish	White Zinc

YID018



品名 Name	O-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	81 g
織帶 Webbing	45 mm
尺寸 Size	W 59.6 mm x L 59.6 mm
表面處理 Finish	Nickel Chrome



YID028

品名 Name	D-Ring (LIGHT)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	76 g
織帶 Webbing	45 mm
尺寸 Size	W 62 mm x L 62 mm
表面處理 Finish	White Zinc Yellow Zinc

YID021




品名 Name	Triangle Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	41 g
織帶 Webbing	45 mm
尺寸 Size	W 59 mm x L 45 mm
表面處理 Finish	White Zinc




YID030 Light

品名 Name	D-Ring (LIGHT)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	79 g
織帶 Webbing	45 mm
尺寸 Size	W 60 mm x L 57 mm
表面處理 Finish	White Zinc Yellow Zinc

YID032 Bent



品名 Name	Bent D-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	116 g
織帶 Webbing	46 mm
尺寸 Size	W 70 mm x L 74 mm
表面處理 Finish	White Zinc Yellow Zinc




NEW YID035 Bent



品名 Name	Bent D-Ring (30°)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	25 kN/ 5000 lbs
重量 Weight (g)	96 g
織帶 Webbing	45 mm
尺寸 Size	W 72 mm x L 94 mm
表面處理 Finish	White Zinc Yellow Zinc



YID031



品名 Name	D-Ring (LIGHT)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	61 g
織帶 Webbing	50 mm
尺寸 Size	W 65 mm x L 59 mm
表面處理 Finish	White Zinc

YID034



品名 Name	Oval-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	49 g
織帶 Webbing	38 mm
尺寸 Size	W 54 mm x L 29 mm
表面處理 Finish	White Zinc

NEW YID037



品名 Name	Anchorage Connector
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	496 g
織帶 Webbing	-
尺寸 Size	W 108 mm x L 75 mm
表面處理 Finish	White Zinc Yellow Zinc

NEW YID038



品名 Name	O-Ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	35 kN/ 7688 lbs
重量 Weight (g)	132 g
織帶 Webbing	58 mm
尺寸 Size	W 78 mm x L 78 mm
表面處理 Finish	White Zinc Yellow Zinc

D-RING
SERIES



D-Ring SERIES

Steel

ALUMINUM

YAD001

品名 Name	D-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	46 g
織帶 Webbing	45 mm
尺寸 Size	W 70 mm x L 70 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD007

品名 Name	O-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	60 g
織帶 Webbing	45 mm
尺寸 Size	W 69 mm x L 69 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD004 Bent

品名 Name	Bent D-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	68 g
織帶 Webbing	46 mm
尺寸 Size	W 76 mm x L 83 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD008

品名 Name	O-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	20 kN/ 4496 lbs
重量 Weight (g)	45 g
織帶 Webbing	59 mm
尺寸 Size	W 79 mm x L 79 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD005

品名 Name	D-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	46 g
織帶 Webbing	45 mm
尺寸 Size	W 70 mm x L 70 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD012

品名 Name	D-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	70 g
織帶 Webbing	50 mm
尺寸 Size	W 75 mm x L 94 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD006

品名 Name	O-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	22 kN/ 5000 lbs
重量 Weight (g)	40 g
織帶 Webbing	27 mm
尺寸 Size	W 51 mm x L 51 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAD013

品名 Name	O-Ring
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN/ 6750 lbs
重量 Weight (g)	47 g
織帶 Webbing	40 mm
尺寸 Size	W 64 mm x L 64 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



D RING SERIES

NAL HON
industrial co., LTD

We committed to quality and safety
for adventurers and workers at height

OUR FACTORY

CHALLENGE YOURSELF. MAKE YOU GREAT!
FORGING EXPERTISE IN STEEL AND ALUMINUM





Buckle SERIES

STEEL

Wire

Aluminum



YIB001

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	54 g
繩寬 Webbing	45 mm
尺寸 Size	W 73 mm x L 40 mm
表面處理 Finish	Yellow Zinc White Zinc




YIB002

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	49 g
繩寬 Webbing	45 mm
尺寸 Size	W 60 mm x L 31 mm
表面處理 Finish	Yellow Zinc White Zinc



YIB003

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	52 g
繩寬 Webbing	45 mm
尺寸 Size	W 68 mm x L 50 mm
表面處理 Finish	Nickel Chrome



YIB004

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4046 lbs
重量 Weight (g)	43 g
繩寬 Webbing	45 mm
尺寸 Size	W 58 mm x L 35 mm
表面處理 Finish	Nickel Chrome



YIB005

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	47 g
繩寬 Webbing	45 mm
尺寸 Size	W 57 mm x L 34 mm
表面處理 Finish	Nickel Chrome



YIB006

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	30 g
繩寬 Webbing	45 mm
尺寸 Size	W 58 mm x L 28 mm
表面處理 Finish	Nickel Chrome



YIB008

品名 Name	Steel Forged Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	101 g
繩寬 Webbing	45 mm
尺寸 Size	W 61 mm x L 42 mm
表面處理 Finish	White Zinc



YIB011

品名 Name	Steel Forged 3 Bar Belt Large Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22.3 kN/ 5000 lbs
重量 Weight (g)	73 g
繩寬 Webbing	45 mm
尺寸 Size	W 71 mm x L 48 mm
表面處理 Finish	Nickel Chrome Yellow Zinc

BUCKLE
SERIES



Buckle SERIES



YIB012

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	22.3 kN/ 5000 lbs
重量 Weight (g)	48 g
繩寬 Webbing	45 mm
尺寸 Size	W 57 mm x L 38 mm
表面處理 Finish	Nickel Chrome Yellow Zinc




YIB016

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	40 g
繩寬 Webbing	45 mm
尺寸 Size	W 58mm x L 29 mm
表面處理 Finish	Nickel Chrome Yellow Zinc



YIB028

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	47 g
繩寬 Webbing	45 mm
尺寸 Size	W 71 mm x L 42 mm
表面處理 Finish	Nickel Chrome White Zinc




YIB029

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	37 g
繩寬 Webbing	45 mm
尺寸 Size	W 57mm x L 37 mm
表面處理 Finish	Nickel Chrome White Zinc



YIB033

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	38g
繩寬 Webbing	45 mm
尺寸 Size	W 61mm x L 36 mm
表面處理 Finish	Yellow Zinc White Zinc



YIB038

品名 Name	Steel Forged Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	17.8 kN/ 4000 lbs
重量 Weight (g)	124 g
繩寬 Webbing	45 mm
尺寸 Size	W 60mm x L 73 mm
表面處理 Finish	ED-Coating



YIB048

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN/ 2698 lbs
重量 Weight (g)	50 g
繩寬 Webbing	45 mm
尺寸 Size	W 46 mm x L 65 mm
表面處理 Finish	ED-Coating



YIB049

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN/ 2698 lbs
重量 Weight (g)	37 g
繩寬 Webbing	30 mm
尺寸 Size	W 42 mm x L 50 mm
表面處理 Finish	ED-Coating



YIB050

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2033 lbs
重量 Weight (g)	21.5 g
繩寬 Webbing	45 mm
尺寸 Size	W 44 mm x L 59 mm
表面處理 Finish	ED-Coating



YIB019

品名 Name	Steel Quick Release Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	12 kN/ 2698 lbs
重量 Weight (g)	130 g
繩寬 Webbing	45 mm
尺寸 Size	W 66 mm x L 72 mm
表面處理 Finish	ED-Coating



YIB063

品名 Name	Steel Buckle (20mm)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9kN/ 2033 lbs
重量 Weight (g)	7 g
繩寬 Webbing	20 mm
尺寸 Size	W 30 mm x L 21 mm
表面處理 Finish	Nickel Chrome ED-Coating



YIB051

品名 Name	Steel Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2033 lbs
重量 Weight (g)	27 g
繩寬 Webbing	45 mm
尺寸 Size	W 30 mm x L 60 mm
表面處理 Finish	ED-Coating



YIB020

品名 Name	Steel Quick Release Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	15 kN/ 3372 lbs
重量 Weight (g)	182 g
繩寬 Webbing	45 mm
尺寸 Size	W 64 mm x L 75 mm
表面處理 Finish	ED-Coating



YIB064

品名 Name	Steel Buckle (20mm)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 4000 lbs
重量 Weight (g)	13 g
繩寬 Webbing	20 mm
尺寸 Size	W 31 mm x L 33 mm
表面處理 Finish	Nickel Chrome ED-Coating



YIB021

品名 Name	Steel Quick Release Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4000 lbs
重量 Weight (g)	130 g
繩寬 Webbing	45 mm
尺寸 Size	W 61 mm x L 75 mm
表面處理 Finish	ED-Coating



YIB065


品名 Name	Steel Buckle (25mm)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2033 lbs
重量 Weight (g)	10 g
繩寬 Webbing	25 mm
尺寸 Size	W 36mm x L 26 mm
表面處理 Finish	Nickel Chrome ED-Coating

BUCKLE
SERIES

STEEL


Wire

Aluminum



YIB066

品名 Name	Steel Buckle (25mm)
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 4000 lbs
重量 Weight (g)	18 g
繩寬 Webbing	25 mm
尺寸 Size	W 38 mm x L 37 mm
表面處理 Finish	Nickel Chrome ● ED-Coating ●



YAB001

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	29 g
繩寬 Webbing	45 mm
尺寸 Size	W 60 mm x L 35 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB002

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	23 g
繩寬 Webbing	45 mm
尺寸 Size	W 57 mm x L 35 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB003

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	20 g
繩寬 Webbing	45 mm
尺寸 Size	W 61 mm x L 45 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB004

品名 Name	Aluminum Adjustaer Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	55 g
繩寬 Webbing	30 mm
尺寸 Size	W 50 mm x L 70 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB011

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	13 g
繩寬 Webbing	45 mm
尺寸 Size	W 60 mm x L 39 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB012

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	15 g
繩寬 Webbing	45 mm
尺寸 Size	W 58 mm x L 26 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB013

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	14 g
繩寬 Webbing	45 mm
尺寸 Size	W 59 mm x L 35 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB014

品名 Name	Aluminum Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	13 g
繩寬 Webbing	45 mm
尺寸 Size	W 57 mm x L 29 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAB015

品名 Name	Quick Release Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/2023 lbs
重量 Weight (g)	154 g
繩寬 Webbing	45 mm
尺寸 Size	W 61 mm x L 78 mm
表面處理 Finish	Anodised ● Customizable Colors



YAB016

品名 Name	Quick Release Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	95 g
繩寬 Webbing	45 mm
尺寸 Size	W 60 mm x L 76 mm
表面處理 Finish	Anodised ● Customizable Colors



YAB029

品名 Name	Quick Release Buckle
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	86 g
繩寬 Webbing	45 mm
尺寸 Size	W 66 mm x L 83 mm
表面處理 Finish	Anodised ● Customizable Colors



YSB024

品名 Name	Stainless Steel Buckle
材質 Material	Stainless Steel
最小斷裂強度 Minimum Breaking Strength	12 kN/ 2698 lbs
重量 Weight (g)	97 g
繩寬 Webbing	50 mm
尺寸 Size	W 76 mm x L 70 mm
表面處理 Finish	Polishing



YSB025

品名 Name	Stainless Steel Buckle
材質 Material	Stainless Steel
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	134 g
繩寬 Webbing	69 mm
尺寸 Size	W 69 mm x L 40 mm
表面處理 Finish	Polishing



YSB021

品名 Name	Stainless Steel 304 Quick Release Buckle
材質 Material	Stainless Steel
最小斷裂強度 Minimum Breaking Strength	9 kN/ 2023 lbs
重量 Weight (g)	114 g
繩寬 Webbing	45 mm
尺寸 Size	W 61 mm x L 75 mm
表面處理 Finish	Polishing



DIELECTRIC PART SERIES

YDE001

品名 Name	Dielectric D-ring
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5000 lbs
重量 Weight (g)	166 g
尺寸 Size	W 87 mm x L 108 mm
表面處理 Finish	Plastic Molding
介電係數 Dielectric Resistance	Min. 9kV



YDE002

品名 Name	Dielectric D-Ring, Bent
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	23 kN/ 5000 lbs
重量 Weight (g)	166 g
尺寸 Size	W 83 mm x L 151 mm
表面處理 Finish	Plastic Molding
介電係數 Dielectric Resistance	Min. 9kV



YDE005

品名 Name	Dielectric Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4000 lbs
重量 Weight (g)	47 g
尺寸 Size	W 68mm x L 41.5 mm
表面處理 Finish	Plastic Molding
介電係數 Dielectric Resistance	Min. 9kV



YDE006

品名 Name	Dielectric Buckle
材質 Material	High Tensile Steel Alloy
最小斷裂強度 Minimum Breaking Strength	18 kN/ 4000 lbs
重量 Weight (g)	63 g
尺寸 Size	W 71 mm x L 54 mm
表面處理 Finish	Plastic Molding
介電係數 Dielectric Resistance	Min. 9kV



DIELECTRIC
SERIES

CONNECTOR SERIES



CONNECTOR SERIES



YAK001

品名 Name	Swivel Connector
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN / 6744 lbs
重量 Weight (g)	160 g
尺寸 Size	W 65 mm x L 108 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAK005

品名 Name	Swivel Connector
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30 kN / 6744 lbs
重量 Weight (g)	153.5 g
尺寸 Size	W 53 mm x L 114 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors




YAK006

品名 Name	Swivel Connector
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	32 kN / 7688 lbs
重量 Weight (g)	76 g
尺寸 Size	W 38 mm x L 85 mm
表面處理 Finish	Anodised ●●●●● Customizable Colors




CONNECTOR SERIES




YAR001

品名 Name	Aluminum Rigging Plate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	40kN
重量 Weight (g)	204g
尺寸 Size	W 121mm x L 157mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAR002

品名 Name	Aluminum Rigging Plate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30kN
重量 Weight (g)	58g
尺寸 Size	W 90mm x L 83mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



YAR008

品名 Name	Aluminum Rigging Plate
材質 Material	Aluminum Alloy
最小斷裂強度 Minimum Breaking Strength	30kN
重量 Weight (g)	67g
尺寸 Size	W 91mm x L 84mm
表面處理 Finish	Anodised ●●●●● Customizable Colors



OTHER

Non Flame Retardant Polyolefin Tubing

Heat Shrinking Tube

Applications

Providing a smooth, glossy finish with bright colors.

Clear version offer exceptional clarity for protecting marked surfaces, An excellent general covering for many autom otive and consum er goods applications.

Characteristics

Low temperature shrinkage

Excellent physical, chemical, and electrical properties Longitudinal change less than most PVC-based materials Flexible and transparent.


Product Dimension

Dia. Size (mm)	Flatten Width (mm)	Package (M/roll)
Ø20	30	100
Ø25	40	50
Ø30	50	50
Ø35	60	50
Ø40	70	50
Ø50	80	25
Ø60	100	25



YE001

品名 Name	Plastic Back Pad
材質 Material	PP
重量 Weight (g)	27 g
尺寸 Size	W 110 mm x L 87 mm



YE002

品名 Name	Plastic Back Pad
材質 Material	PP
重量 Weight (g)	24 g
尺寸 Size	W 102 mm x L 90 mm



YE003

品名 Name	Plastic Thimble
材質 Material	PP
重量 Weight (g)	2 g
繩徑 Rope Dia.	13 mm
尺寸 Size	W 36 mm x L 30 mm



YE004

品名 Name	Plastic Thimble
材質 Material	PP
重量 Weight (g)	5 g
繩徑 Rope Dia.	10 mm
尺寸 Size	W 43 mm x L 44 mm



YE005

品名 Name	Plastic Keeper
材質 Material	PP
重量 Weight (g)	3 g
繩徑 Rope Dia.	45 mm
尺寸 Size	W 51 mm x L 15 mm

OTHER

PROFESSIONAL HOOKS

**FORGING
EXPERTISE
IN STEEL
AND
ALUMINUM**



NAL HON INDUSTRIAL CO., LTD.



**OUR
FACTORY**

CHALLENGE YOURSELF, MAKE YOU GREAT

1981

Established

**NAL HON
industrial co., LTD**

*We committed to quality and safety
for adventurers and workers at
height.*

GREAT TOOLS, EXCELLENT JOBS

www.hooks.com.tw



**SATISFACTION
INNOVATION
SAFETY FIRST**



INSTERGRAM

SCAN TO LEARN MORE ABOUT
OUR PRODUCTS.



NAL HON INDUSTRIAL CO., LTD.

No. 418, Xihu Rd., Dali Dist., Taichung City, Taiwan

TEL : +886-4-24969966

FAX : +886-4-24968811

E-mail : info@nalhon.com.tw